

GEOPHYSICAL REINTERPRETATION TO IDENTIFY NEW DRILL TARGETS OF THE ROUND TOP CU-MO-AG DEPOSIT, ILLINOIS CREEK DISTRICT, WESTERN ALASKA

Kit Marrs, Western Alaska Copper & Gold Company; Nicole Pendrigh, Zonge Engineering, Denver, Co. and Scott Urquhart, Zonge Engineering, Tucson, AZ - Presented at the 2010 Alaska Miner's Association Convention, Anchorage, Alaska

Often, when a geophysical survey is acquired, a basic interpretation is performed, and drilling immediately follows. Then the geophysical data are filed away and forgotten. In the case of the Round Top Project, Western Alaska Copper & Gold Co. and Zonge Engineering have partnered to revisit the 1981-84 geophysics – review old data, re-interpret and reintegrate, and compare to new data acquired in 2010. Using 3-D visualization of geophysics, geology and geochemistry, the data from the early 1980's have been re-interpreted, the new zones of interest have been identified, as well as providing correlation to known mineralization. This paper will focus on the re-modeling of the induced polarization data integrated with surface geology.

LOCATION

Located in the Illinois Creek Mining District, Kaiyuh Mountains of western interior Alaska, the Round Top CU-MO-AG deposit is near the village of Kaltag, approximately 60 miles south of Galena and 18 miles east of the Yukon River. Initial discoveries in the district by the Anaconda Minerals Company in 1980 included the Illinois Creek Au-Ag deposit, the Round Top porphyry Cu-Mo-Ag deposit and the Honker high grade Au-Ag vein system.



Figure 1: Alaska Location Map

REGIONAL GEOLOGY

The south-central Kaiyuh Mountains are a subdued mature range of rolling hills and meandering rivers. The entire region lies south of the Kaltag Fault, a major northeast trending strike slip fault with right lateral offset of up to 100 km. Topographic expression along the fault indicates that some recent movement has been dip-slip. Many topographic linears in the Kaiyuh Mountains are interpreted to be parallel fault splays or otherwise related to this structure. The Kaiyuh Mountains are comprised of three distinct geologic terrains: 1) an older lower Paleozoic schist terrain that contains quartzite, dolomite and carbonate units; 2) a Jurassic sequence of mafic intrusive and volcanic rocks and undifferentiated sediments; and 3) intrusive rocks which include a Cretaceous

pole-dipole Resistivity and IP data over the Round Top Project, and one dipole-dipole line in 1982. The five 1981-82 lines are shown on the 1982 GP Reinterpretation map (Figure 2), along with one of the new 2010 lines, 7000N, which is the project base line. Thirteen ground electromagnetic lines are shown with some of the more prominent EM anomalies indicated by Diamonds. The high grade silver-lead-zinc vein and breccia mineralization at TG and TG North are shown to indicate their special relationship to the Round Top intrusive system.

1981 LINE 69800E PSUEDO SECTION EXAMPLE

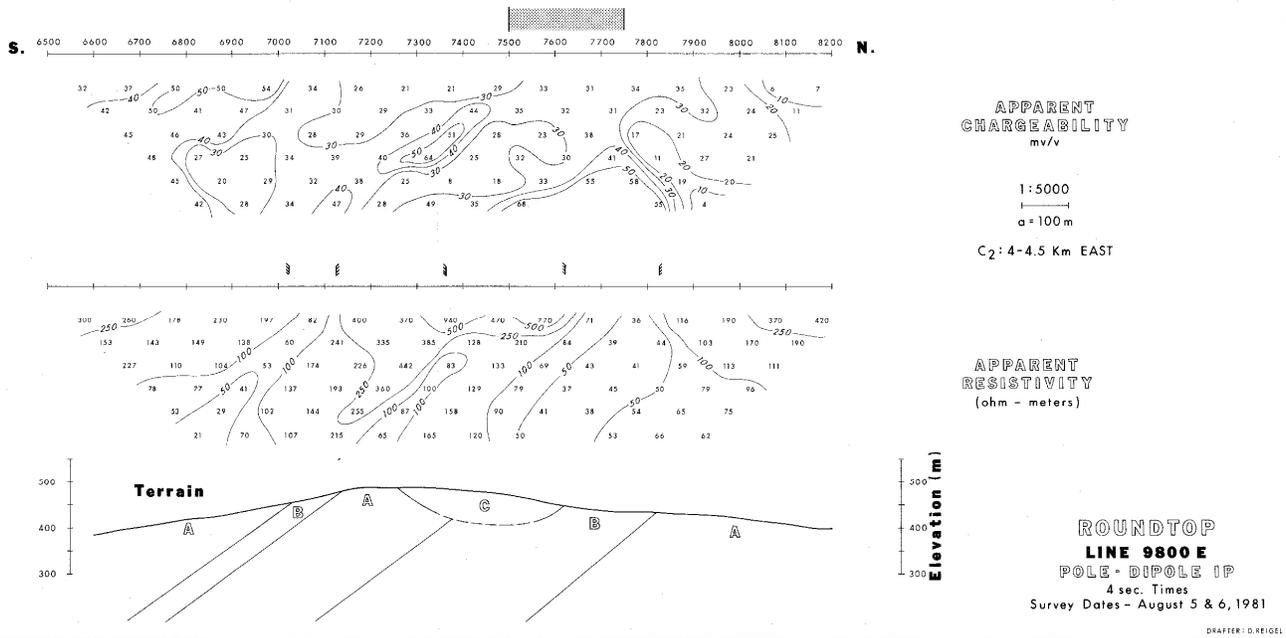


Figure 3: Line 70500E

Figure 3 is an example of the original 1981 Line 69800E lines of numerical data with hand contoured interpretation. Chargeability is on the top and Resistivity on the bottom.

In 2010, this 1981 data was successfully digitized and reprocessed with information from the 1981 geophysics report. Issues that were dealt with include: very bad coupling in some areas – data was removed from the 1981 data, a pole-dipole configuration where the transmitter ‘infinite’ was kilometers away to the east, creating a current perpendicular to the line, and the survey lines originated at the top of the ridge, then read to the north, returned to the top, then to the south, on the downslope, resulting in an unknown array geometry.

After reprocessing the data with modern software, inverted model Resistivity and IP sections were evaluated and interpreted, and compared to the original geologic and geophysical conclusions. The newly modeled 1981 data was compared and contrasted with the original interpretations to see if the zones were still valid.

These older pseudo sections are a valuable resource for the application of modern 2 Dimensional Inversion Modeling techniques.

LINE 69800E RE-PROCESSED 2010 BY ZONGE

Line 69800E (Fig. 4) shows a Resistivity low, indicated by yellow-green colors in the center of the section that outlines the West Lobe Quartz Latite Fragmental (QLF) unit. A sharp boundary and/or contact is indicated on the south edge of this Resistivity low. A possible sulfide conductor that correlates with the intrusive/schist contact is on the north edge. **This is a new target for drilling.** A small conductor at 7700N may be part of a fault zone or structure.

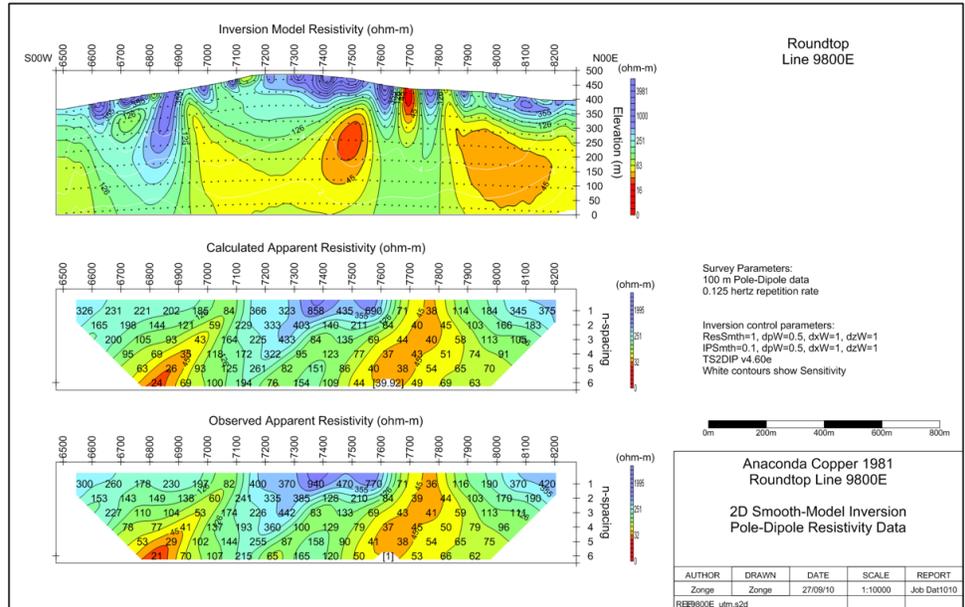


Figure 4: 1981 Line 69800 E Resistivity

LINE 70200E RE-PROCESSED 2010 BY ZONGE INDUCED POLARIZATION

Drill Holes RT- 4 & 5, depicted in Figure 5 on the Zonge reprocessed Line 70200E, located in the West Lobe QLF unit, are weakly mineralized. IP indicates a conductor to the south and a steep contact or possible structure on the north. The IP anomaly outlines the disseminated sulfides in the West Lobe. The anomaly is not limited in its depth extent. The lower limit is the limit of data and is an artifact of the modeling.

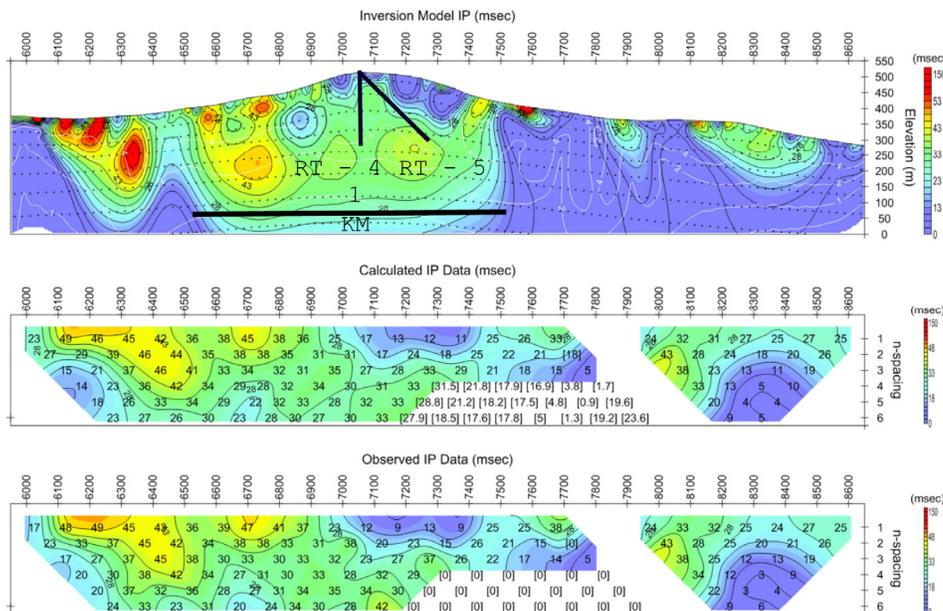


Figure 5: Line 70200E

LINE 70500E RESISTIVITY - RE-PROCESSED 2010 BY ZONGE

In Figure 6, Section 70500E, drill hole RT-6 intersected weak copper mineralization within in the Quartz Latite Fragmental unit. A near vertical IP anomaly with a sharp northern contact is indicated 160 meters north of RT-6. The Resistivity section displays a more developed conductor that extends to depth. DDH RT-6 cuts two fault zones and a silicified breccia before bottoming in altered schist. Mineralization intersected at the bottom of the RT-6 included an interval of 3.3 meters of 108 g/T silver + Cu + Pb + 150 ppb gold.

This is another target indicated by the new 2D model.

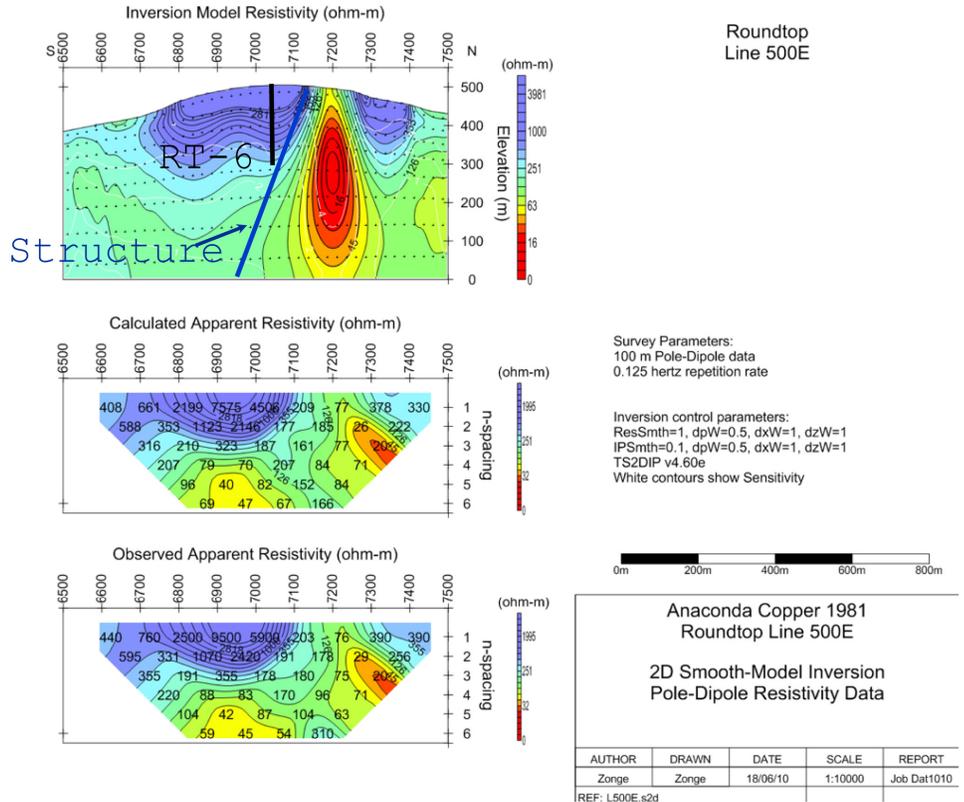


Figure 6: Section 70500E

LINE 70800E - RE-PROCESSED 2010 BY ZONGE

On line 70800E (Fig. 7) a definite conductor is delineated by both Resistivity and IP. Here, in the Resistivity section, the shallow 1981 discovery drill hole RT-2 is shown cutting the partially oxidized top of a significant sulfide conductor. RT-2 intersected three zones of Cu-Ag mineralization with grades of: .98%, 1.2% and 1.8% CU and 10-20 g/t AG over widths of 4.3 to 7.3 meters. **This cross section begs for a deeper drill hole!**

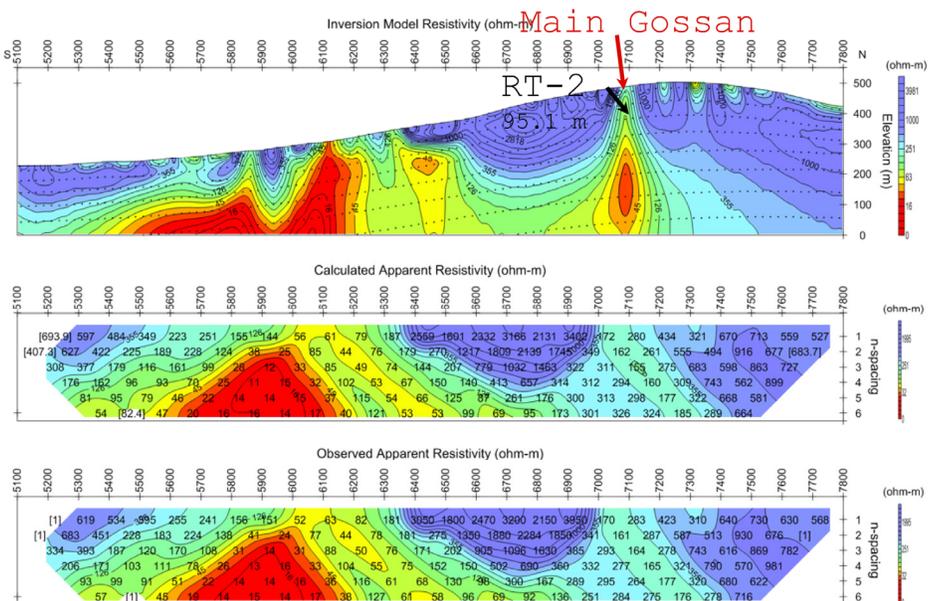


Figure 7: 2D INVERSION LINE 70800 E Resistivity

LINE 71400E IP AND RESISTIVITY - RE-PROCESSED BY ZONGE

Section 71400E is significant because it is the only cross section that combines known surface geology and geochemistry with sub-surface geology from two drill holes, RT-3 and RT-7 (the deepest drill hole at Round Top) and geophysical data from both 1981 and 2010. Drill hole RT-7 is shown on this section (Figure 8), penetrating to a depth of 494.3 m between two IP anomalies. RT-7 intersected significant copper mineralization with five zones of + 0.50% Cu that included 10.4 m of 0.86% Cu, 5.2 m of 1.1% Cu and 7.5 m of 0.80% Cu. For more than 360 meters, RT-7 averaged 0.21% Cu. However, the IP anomaly just south of RT-7 likely indicates a higher sulfide zone within the Quartz Monzonite Porphyry than intersected by RT-7. **It represents another new target.**

The Resistivity (Figure 9) confirms the IP anomaly south of RT-7, but also indicates a large conductor within the Quartz Monzonite Porphyry at 5950N. This correlates with both an IP and a 1981 electromagnetic conductor, and **is another new target, as a result of the Zonge 2D Inversion Modeling.**

The Resistivity also indicates the highly resistive quartz stockwork zone that extends from the surface just north of RT-7 and is also cut at depth.

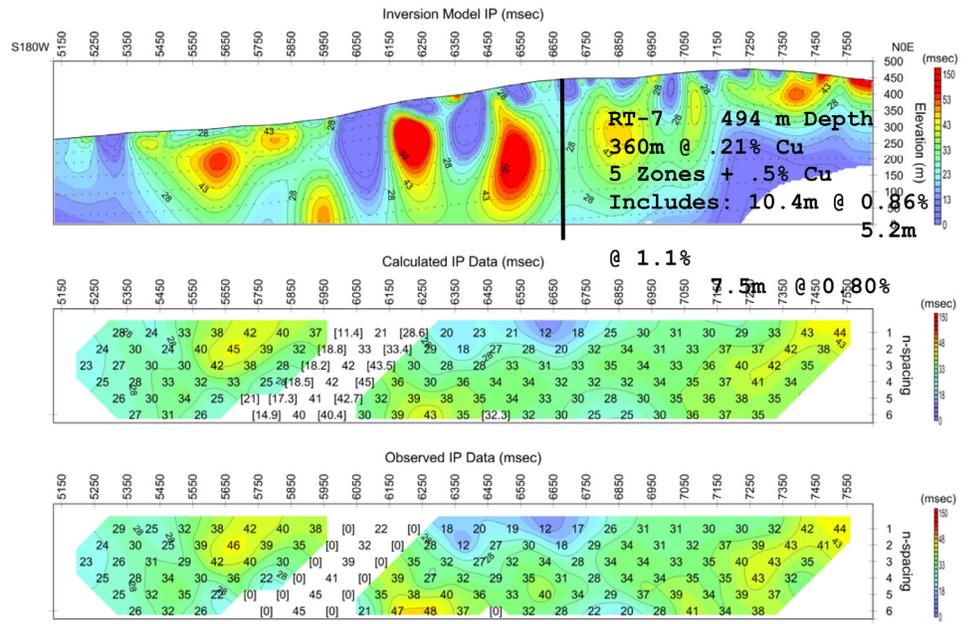


Figure 8: 2D INVERSION 1981 LINE 71400 E IP

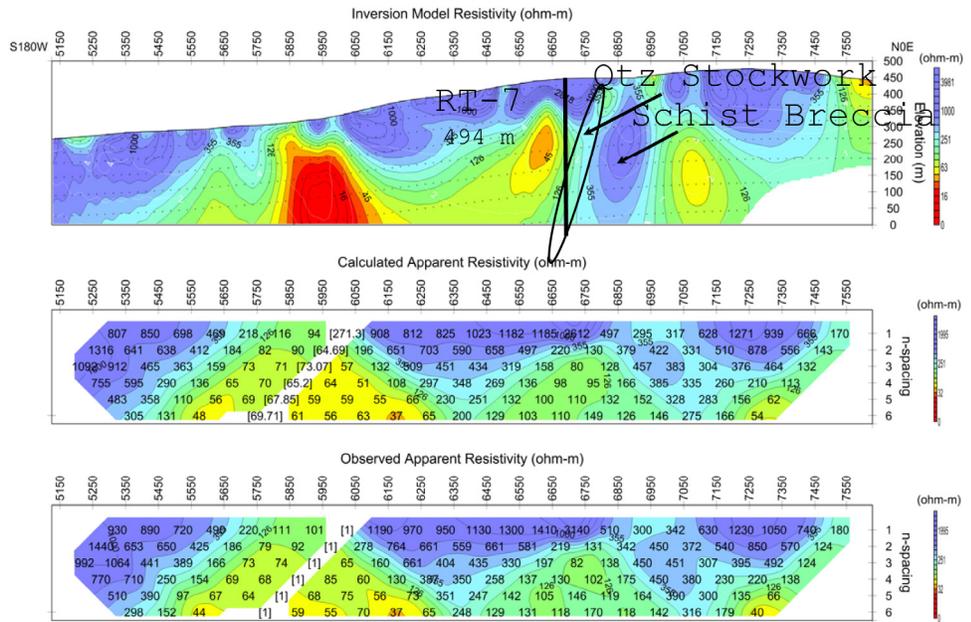


Figure 9: 2D INVERSION 1981 LINE 71400 E Resistivity

200 METER DEPTH SLICE – MAP VIEW WITH RESISTIVITY LINES

This map, Figure 10 is an overlay of all of the Resistivity data at the 200 meter elevation below the surface and is a convenient way to correlate geophysical data with the geology and geochemical information.

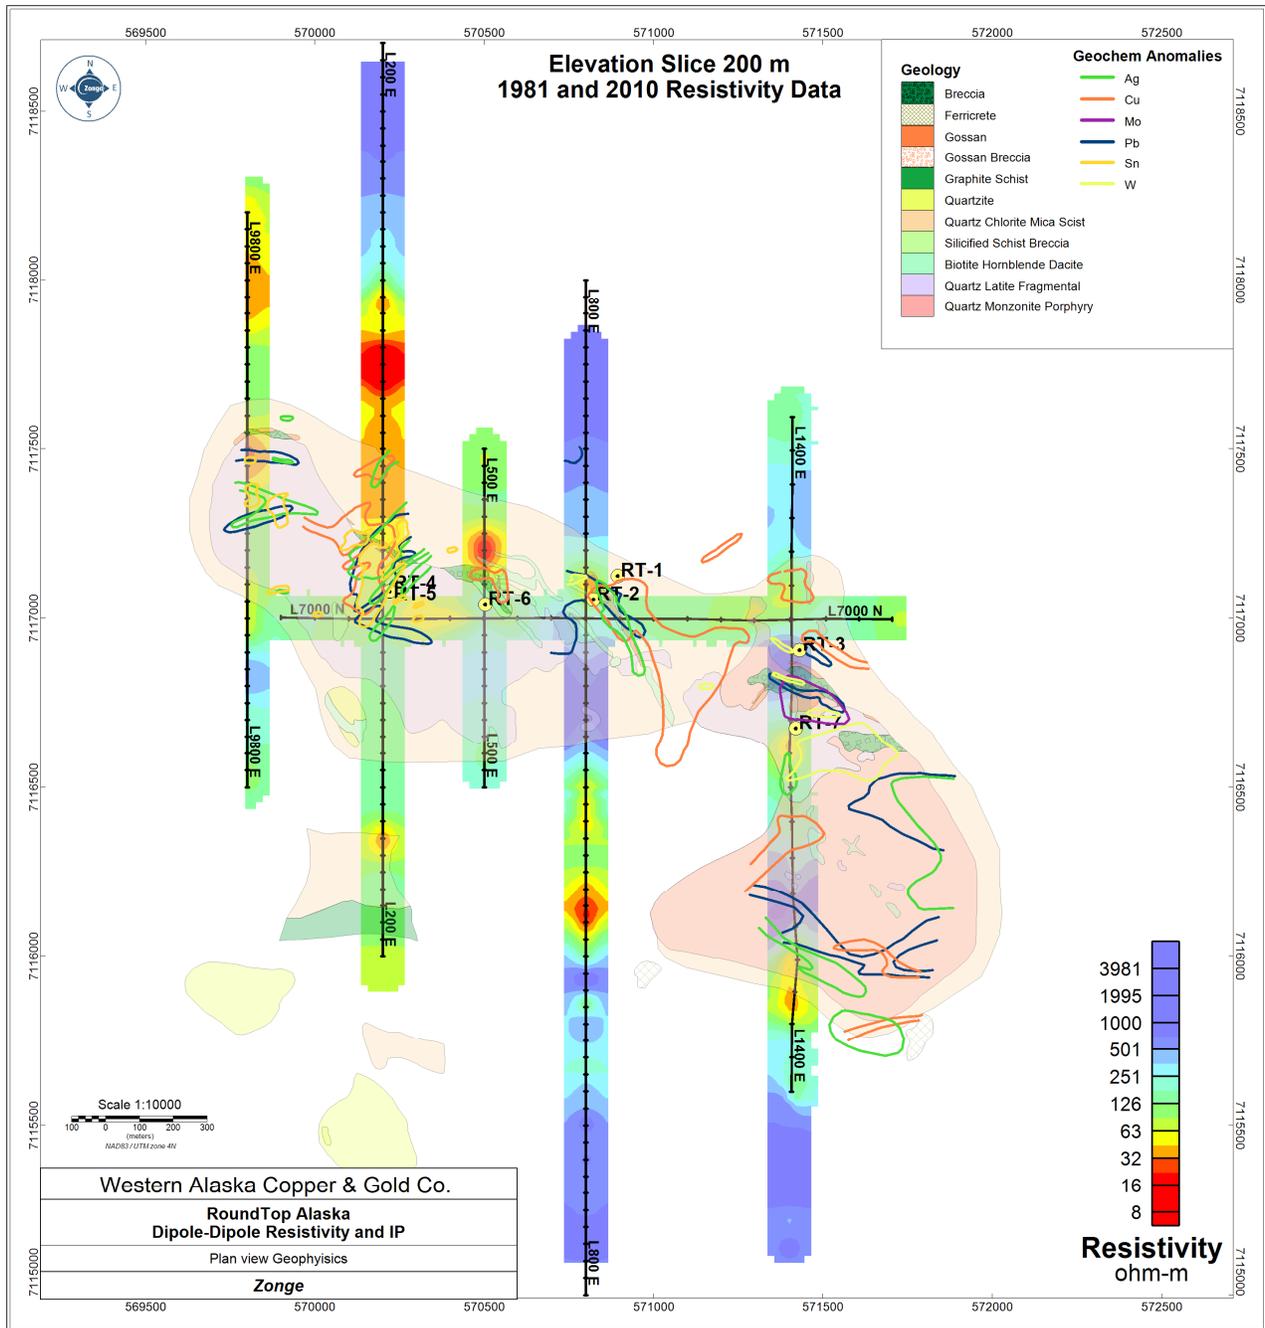


Figure 10

3D VISUALIZATION

By using 3-D visualization of geophysics, geology and geochemistry, the data from 1981 have been reinterpreted, the zones of interest have been identified, as well as providing correlation to known mineralization. Several new targets for drilling have been identified as a result of this work as shown in the 3D model (Figure 11).

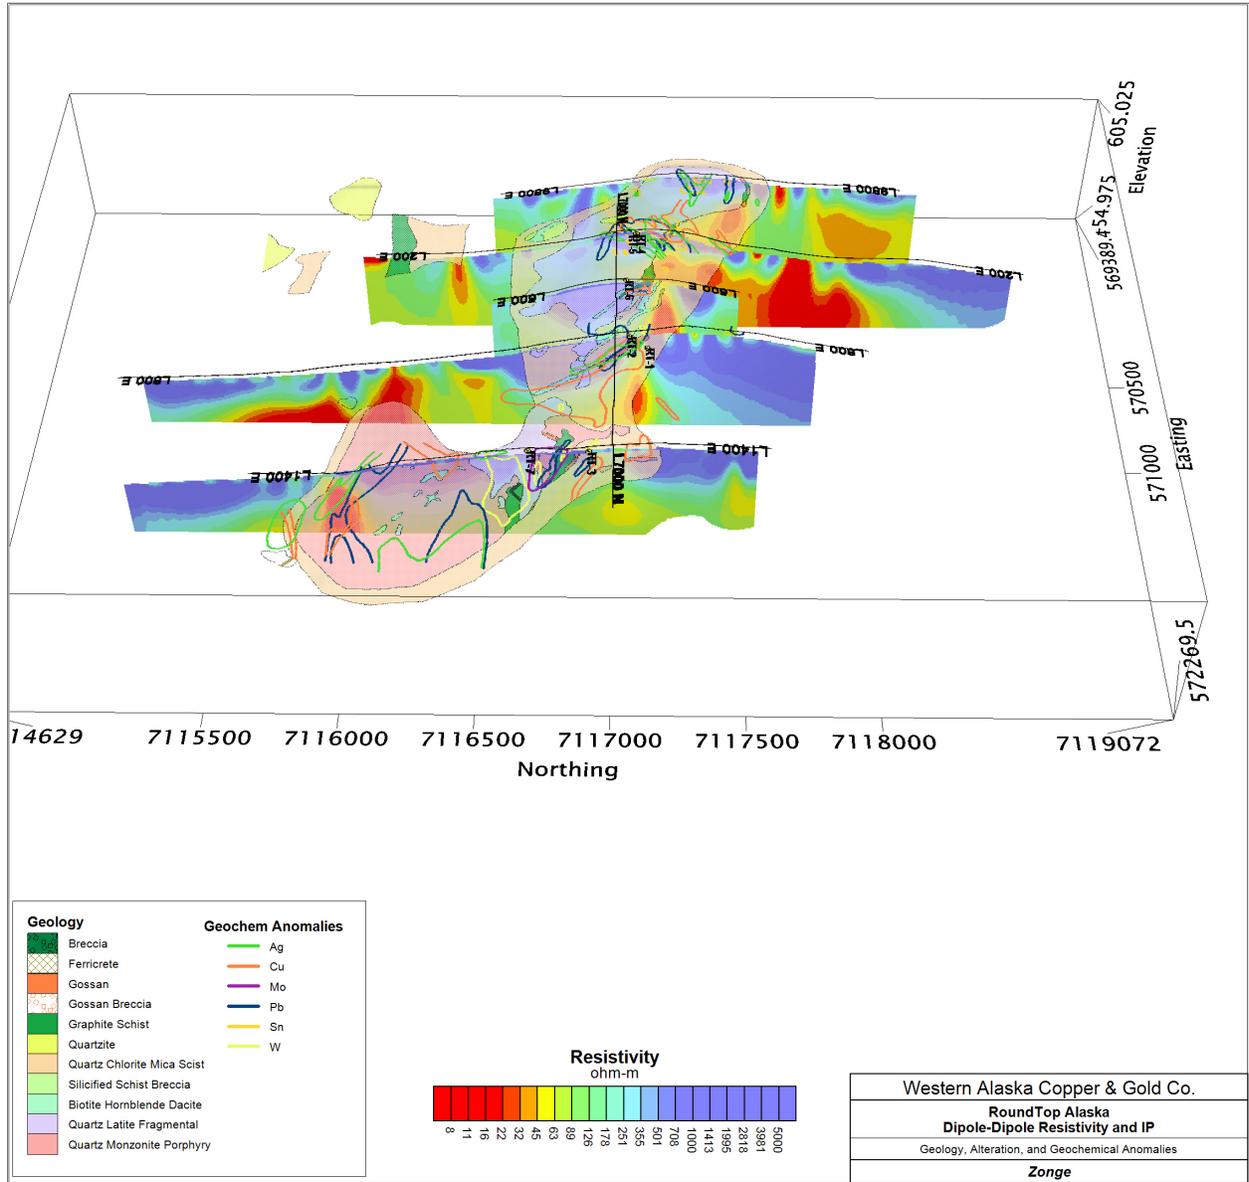


Figure 11

SUMMARY & TARGET GENERATION

By partnering with Zonge Engineering, historical IP data has been combined with modern computerized geophysical modeling techniques and with geology and geochemistry to better identify new drill targets. In summary, with this new information, the Round Top porphyry Cu-Mo system is a drill ready prospect with multiple follow-up and step-off targets including; 1) a large porphyry Cu-Mo system south of the East Lobe defined by a pronounced aeromagnetic high anomaly and IP data, 2) Cu-Ag-Pb-Zn skarn based on both surface outcrop, both EM and IP geophysical data and sub-surface drill intercepts in RT-2 & 7 and localized by the NW trending structure along the north side of the Round Top intrusive system, 3) Volcanic-“muffled” hypogene mineralization at depth and below the Quartz Latite Fragmental in the West Lobe (Riedell, 2010), 4) a “Bonanza style” Ag-Pb-Zn structurally controlled vein/breccia mineralization localized by large NW trending structures in the TG and TG North areas and 5) a “blind” hydrothermal high grade Cu breccia target at the East Lobe.

Several detailed and untested targets have been produced by Zonge’s modern 2D Inversion Modeling of old 1980’s numerical geophysical data. These targets, along with several others at Round Top that have not yet been surveyed with geophysical methods are shown in the last illustration.

These targets, along with several others at Round Top that have not yet been surveyed with geophysical methods are shown in Figure 12 Round Top and TG North Area Target Map, the last illustration.

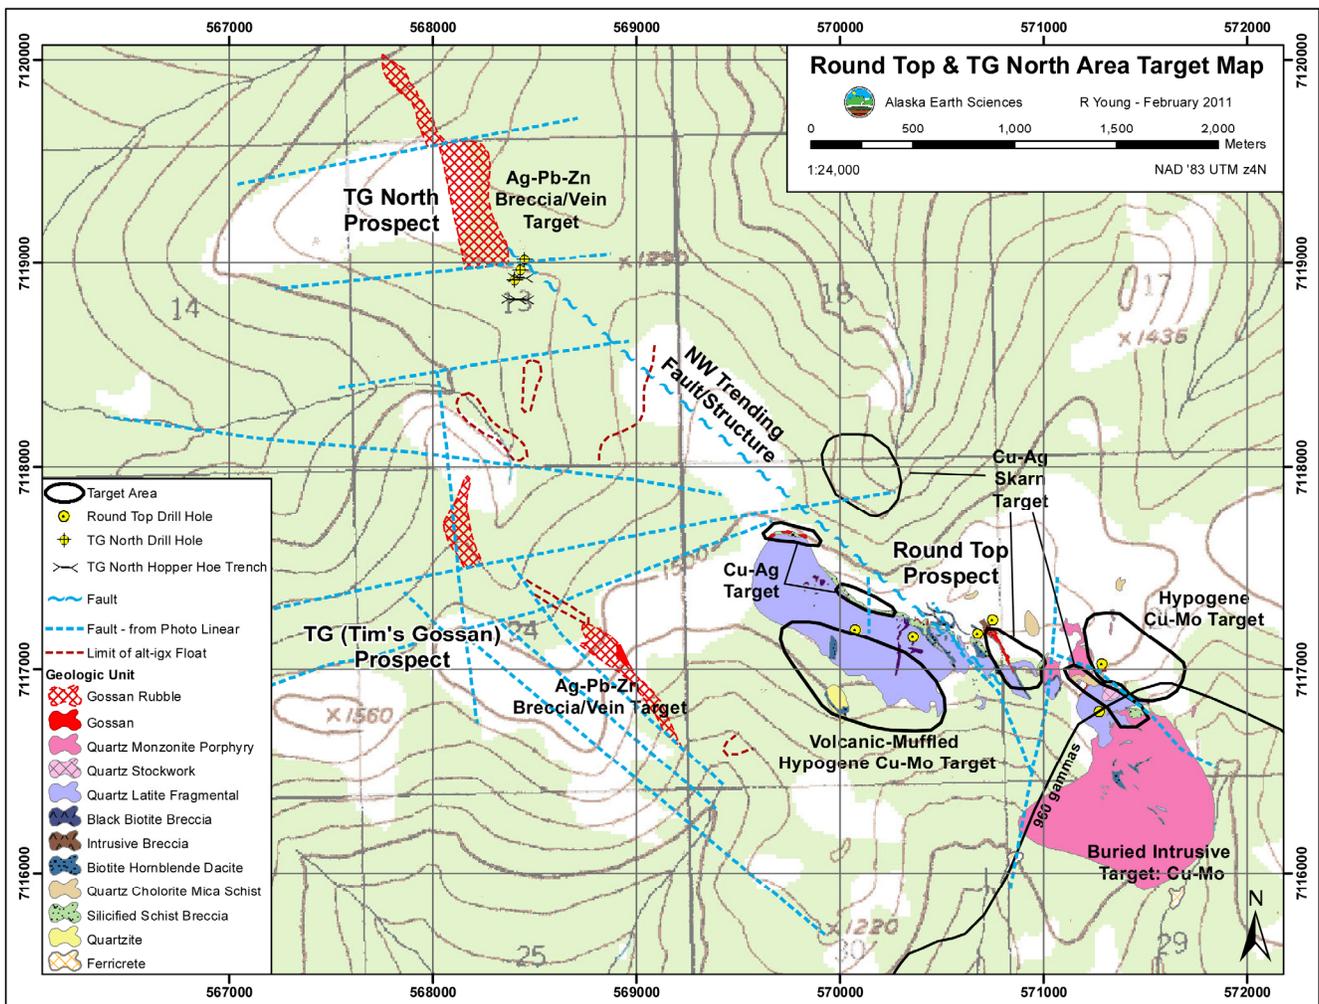


Figure 12

For additional information about opportunities at the Round Top property or a digital color copy of the Zonge report, please contact Kit Marris at kitmarris@mac.com.

Acknowledgements: Special thanks to Zonge Engineering, and especially Nicole Pendrigh and Scott Urquhart, for agreeing to take on this project and also thanks to Scott MacInnes at Zonge for his insightful comments and ideas for the AMA presentation.

References:

C. Hrabak, 1982, Round Top Project Geophysical Results, Anaconda Minerals Company, internal report
MacInnes, S and Zonge, K.L., 1996, Two-dimensional inversion of Resistivity and IP data with topography, Northwest Mining Association, Spokane, WA

Marris, K, 2009, Explorations Update: Illinois Creek Mining District, Kaiyuh Mountains, Western Alaska, Alaska Miners Association Annual Convention.